


# 110V Slimline Floodlights

FL50Y/FL100Y/FL150Y



LED Slimline Floodlights suitable for 110V site lighting applications are available in 50W, 100W, and 150W. Constructed from robust die-cast aluminium and fitted with surge protection as standard.

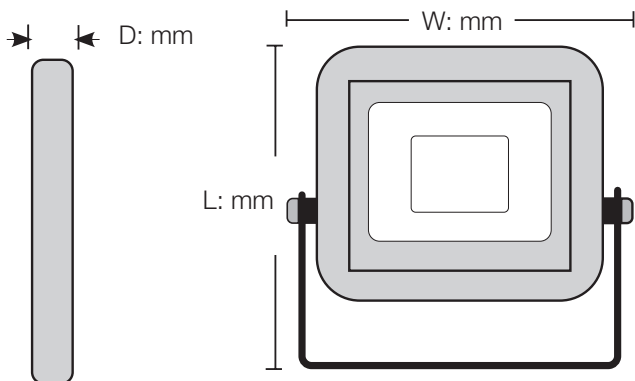

## Product Specification

- IP/IK: IP65/IK07
- Material: Die-cast aluminium
- Colour Temperature: 6500K
- Guarantee: 2 years
- Life Expectancy: 30,000 hours
- Working Temperature: -20°C to 45°C
- Power Factor: 0.9
- Beam Angle: 110°
- CRI: 80 Ra
- 1m cable included
- 95lm/W
- Bracket allows 360° adjustment
- Built in surge protection
- Yellow finish

## Dimensions (LxWxD mm)

- FL50Y 205 x 165 x 33
- FL100Y 290 x 230 x 41
- FL150Y 330 x 270 x 47